




AVAILABLE VOLTAGE
 230v-3ph-60hz
 460v-3ph-60hz
 575v-3ph-60hz

MADE IN USA

MODEL	CAPACITY* (SCFM)	REF. COMP. (HP)	IN/OUT (Inches)	SHIPPING WGT. (LBS)
DX1600A	1600	7.5	4" NPT	1080
DX2000A	2000	10	4" NPT	1795
DX2500A	2500	12	4" NPT	1985

* Capacity based on CAGI standard No. ADF100:
 Test conditions of 100 F Inlet Temp, 100 F
 ambient temp, 100 psig operating pressure, 38 F
 dewpoint.

232 PSIG MAWP

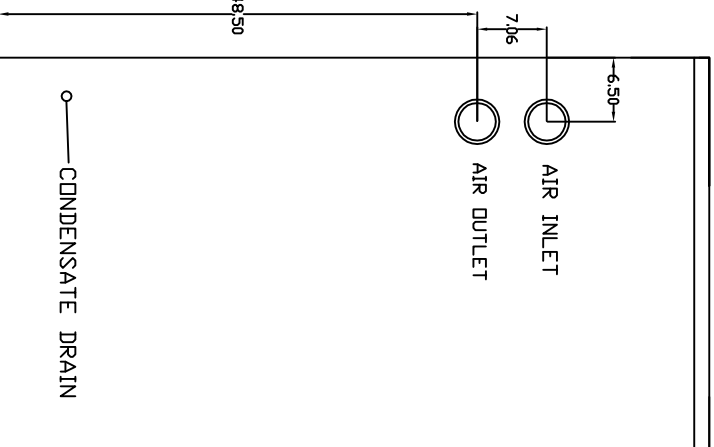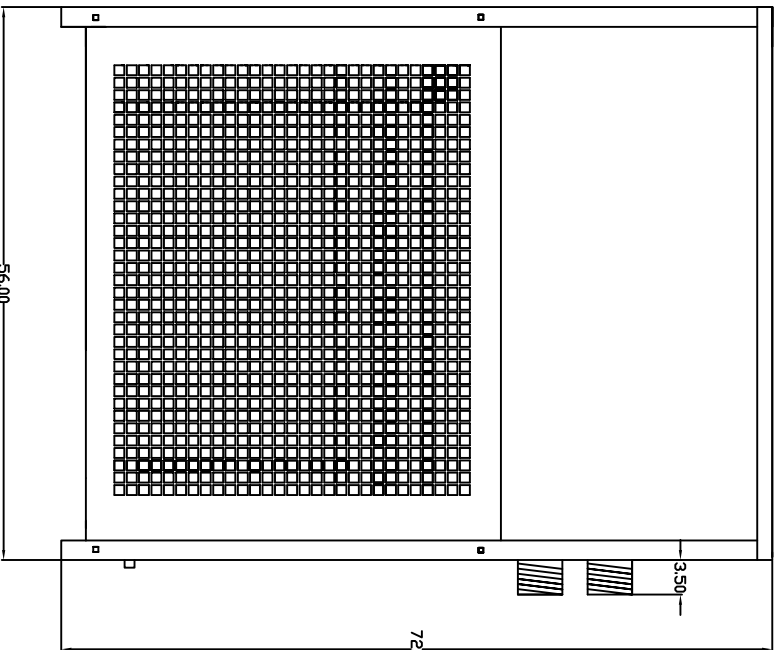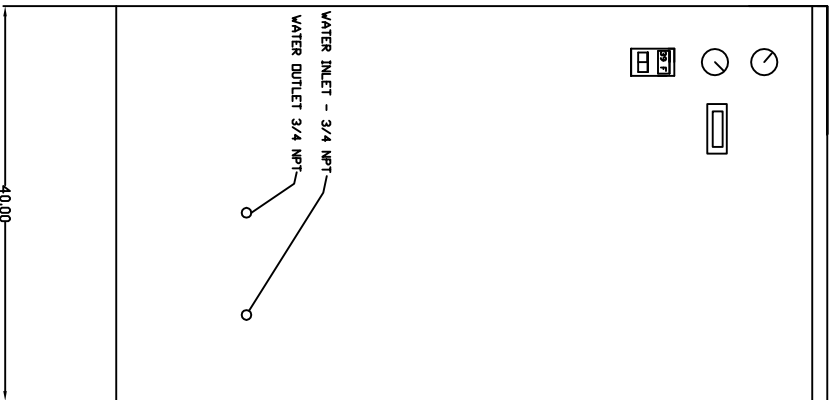

STANDARD FEATURES

- COPELAND DIGITAL SCROLL COMPRESSOR - MADE IN USA
- CLOSED LOOP DIGITAL CONTROLLER - COPELAND/EMERSON
- ADX ALUMINUM HEAT EXCHANGER MODULE
- REF SUCTION PRESSURE GAUGE
- REF DISCHARGE PRESSURE GAUGE

DIGITAL DEWPOINT READOUT

- ON/OFF SWITCH
- DRYER ON LIGHT
- HIGH PRESSURE SHUTDOWN SWITCH W/MANUAL RESET
- R404A REFRIGERANT
- FAN CYCLING CONTROL

MACCAIR INC. www.maccair.l.com	
4123 Pioneer dr Walled Lake, MI 48390	
DX1600A DIGITAL SCROLL ENERGY SAVING AIR DRYER DIMENSIONAL DW/G	
Rev	
Rev.Da te	
DATE	4-2014
DX-DIM-1600-1	