

AVAILABLE VOLTAGES



460V-3PH-60HZ
 230V-3PH-60HZ
 575V-3PH-60HZ

MADE IN USA

MODEL	CAPACITY* (SCFM)	REF. COMP. (HP)	IN/OUT (Inches)	SHIPPING WGT. (LBS)
DX400A	400	2	2	486
DX500A	500	3	2	526
DX625A	625	3	2	530

DESIGN CONDITIONS

CAPACITY IS BASED ON CAGI STANDARD NO. ADF100.
 INLET TEMP 100 F, INLET PRESSURE 100 PSIG
 AMBIENT TEMP 100 F, 38 F DEWPOINT

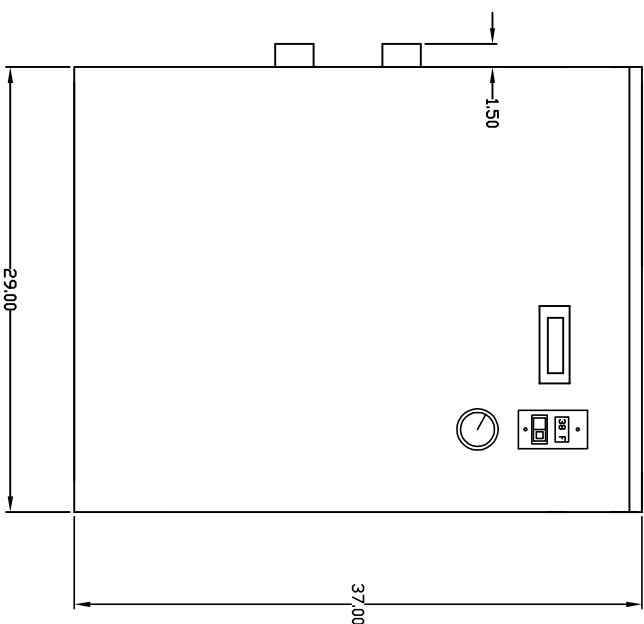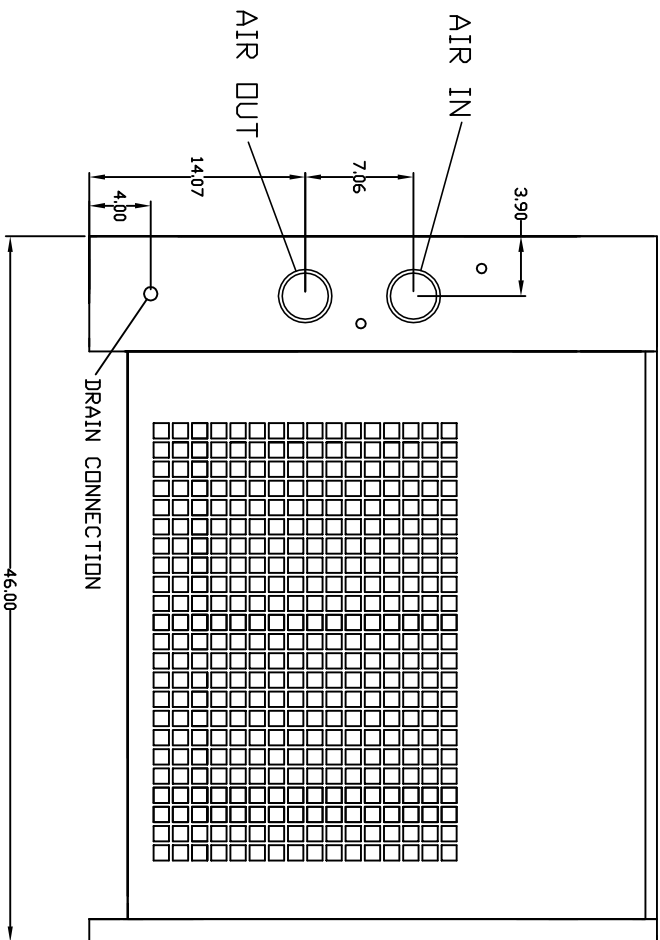

STANDARD FEATURES

COPELAND DIGITAL SCROLL COMPRESSOR - MADE IN USA
 CLOSED LOOP DIGITAL CONTROLLER - COPELAND/EMERSON
 ADX ALUMINUM HEAT EXCHANGER MODULE
 REF SUCTION PRESSURE GAUGE
 REF DISCHARGE PRESSURE GAUGE

DIGITAL DEWPOINT READOUT

ON/OFF SWITCH
 DRYER ON LIGHT
 HIGH PRESSURE SHUTDOWN SWITCH W/MANUAL
 RESET
 R404A REFRIGERANT
 FAN CYCLING CONTROL

MACCAIR INC. www.maccairl.com	
4123 Pioneer dr Walled Lake, MI 48390	
DX400, DX500 & DX625 GENERAL LAYOUT	
Rev	
Rev.Date	
DATE	1-2014
DX-DIM-400-625-1	