STANDARD VOLTAGES

460v-3ph-60hz or 230v-3ph-60hz

MADE IN USA

MODEL	CAPACITY* (SCFM)	REF. COMP. (HP)	IN/OUT (Inches)	SHIPPING WGT. (Lbs)
UA1600	1600	7.5	4" NPT	1080
UA2000	2000	10.0	4" NPT	1297

* Capacity based on CAGI standard No. ADF100:
Test conditions of 100 F Inlet Temp. 100 F ambient temp. 100 psig operating pressure, 38 F dewpoint.

232 PSIG MAWP

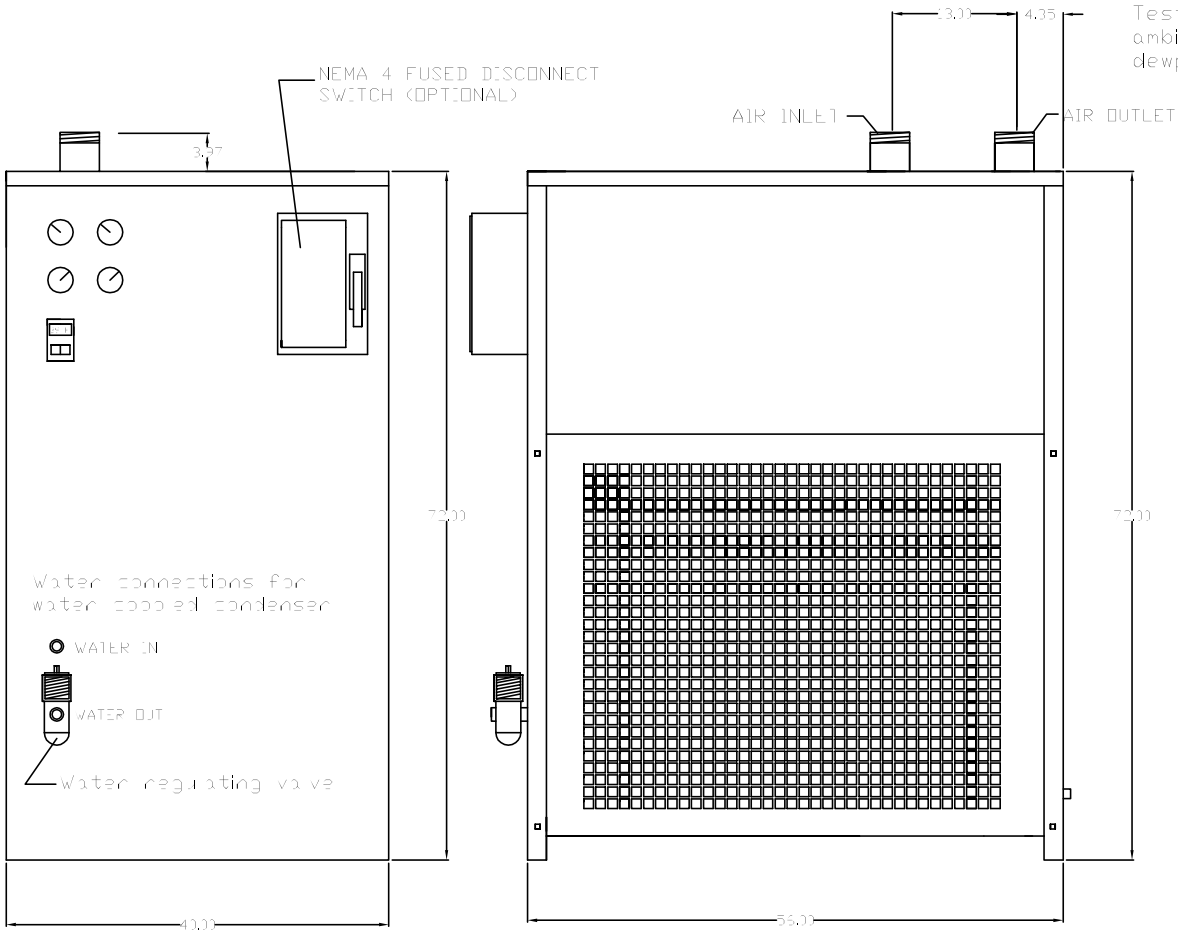

STANDARD FEATURES

DIGITAL DEWPOINT READOUT
ON-OFF SWITCH
REFRIGERANT SUCTION GAUGE
REFRIGERANT DISCHARGE GAUGE
INLET PRESSURE GAUGE
INLET TEMPERATURE GAUGE
DRYER ON LIGHT
COPELAND SCROLL COMPRESSOR
3 IN 1 ALUMINUM HEAT EXCHANGERS
FAN CYCLING SWITCH
HIGH PRESSURE SHUTDOWN/W MANUAL RESET
LOW REF PRESSURE SHUTDOWN SWITCH
WATER COOLED CONDENSER (OPTIONAL)
WATER REGULATING VALE (OPTIONAL)
FUSED DISCONNECT SWITCH (OPTIONAL)

MACAIR INC. www.macair1.com
4123 Pioneer dr
Walled Lake, MI 48390

UA1600 & UA2000
DIMENSIONAL DWG

Rev		UA-DIM-2000-1
Rev.Date		
DATE	11-2016	