



AVAILABLE VOLTAGE

115V-1ph-60hz
230V-1ph-60hz

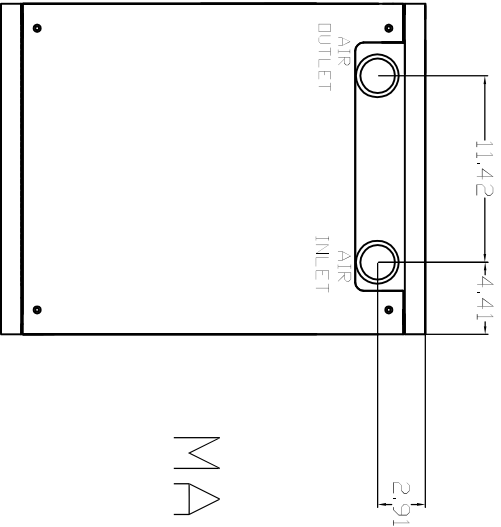

MADE IN USA

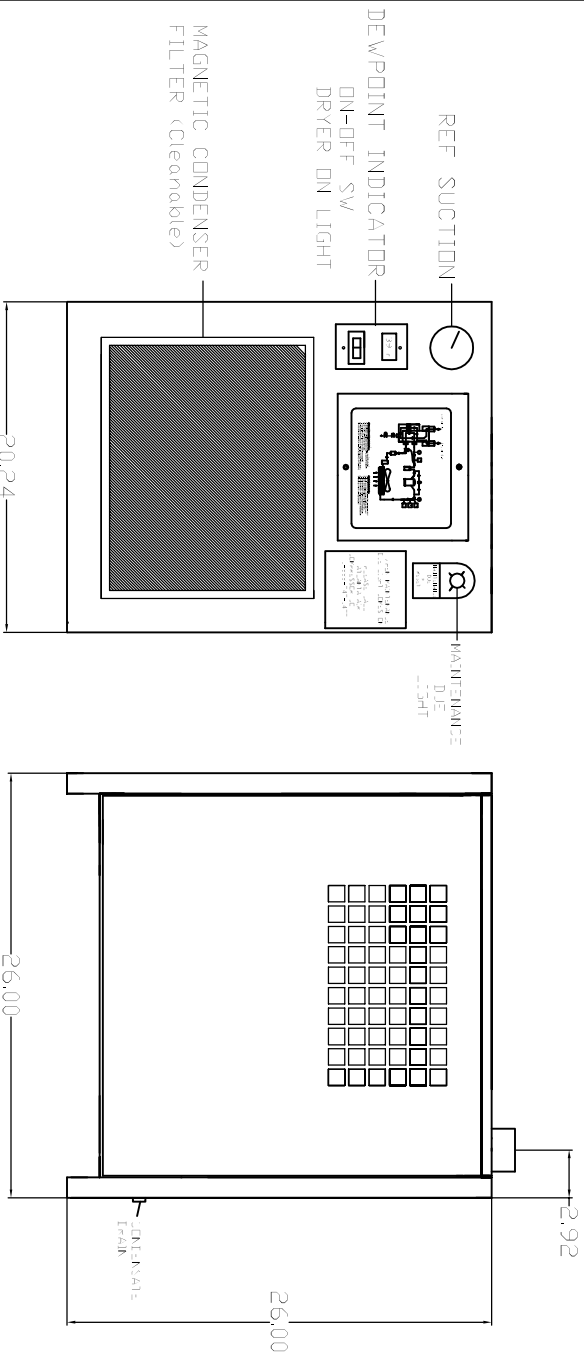

MODEL	CAPACITY	IN & OUT CONNECTION	SHIPPING WT
UA75A	75	1" NPT	180 LBS
UA100A	100	1" NPT	195 LBS
UA125A	125	1" NPT	205 LBS
UA150A	150	1 1/2" NPT	215 LBS
UA200A	200	1 1/2" NPT	225 LBS

DESIGN CONDITIONS

INLET CAPACITIES BASED ON CAGI ADP100
100 F INLET TEMP, 100 F AMBIENT TEMP,
100 PSIG INLET PRESSURE 38 F DEWPOINT

UA75A, UA100A, UA125A, UA150A, UA200A STANDARD FEATURES

- SERVICE DUE LIGHT
- DIGITAL DEWPOINT READOUT
- REFRIGERANT ANALYZER GAUGE
- ON/OFF SWITCH
- DRYER ON LIGHT
- PROGRAMMABLE TIME OF DAY DRYER ON-OFF TIMER
- TECUMSEH COMPRESSOR - MADE IN USA
- COMPRESSOR THERMAL OVERLOAD
- 3 IN 1 ALUMINUM HEAT EXCHANGER MODULE
- AIR TO AIR HEAT EXCHANGER
- AIR TO REFRIGERANT HEAT EXCHANGER
- STAINLESS STEEL MESH MOISTURE SEPARATOR
- HOT GAS BYPASS VALVE
- AIR COOLED CONDENSER W/FAN MOTOR
- LOW PRESSURE SHUTDOWN
- HIGH REFRIGERANT PRESSURE SHUTDOWN
- W/MANUAL RE-SET SWITCH
- POWDER COATED STEEL CABINET
- EASY ACCESS CABINET
- ADJUSTABLE ELECTRIC DRAIN VALVE
- REMOVABLE CONDENSER VENT COVER
- PROGRAMMABLE ELECTRONIC AUTO DRAIN VALVE
- DRAIN VALVE Y STRAINER & ISOLATION VALVE
- MAGNETIC CONDENSER FILTER (Cleanable)

MACCAIR INC. www.maccair1.com
4123 Pioneer dr
Walled Lake, MI 48390

UA75A, UA100A, UA125A, UA150A, UA200A
DIMENSIONAL DRAWING

Rev	Rev.Date	Rev.Description

DATE 8-29-2018

UA-ZB-75-200-1